AQUA SYNTHETIC UNDERCOAT

aqua paints
দেশের রঙে রাঙাই দেশ

PRODUCT DESCRIPTION




Aqua Synthetic undercoat is based on special type of Alkyd resin with anticorrosive pigments & extenders. This is usually applied on metal, interior or exterior, industrial machineries, all types of vehicle wherever a high quality decorative like N.C finish is required.

NT THINNER COMPATIBLE

LASTING DURABILITY

PRODUCT INFORMATION


Pack Size

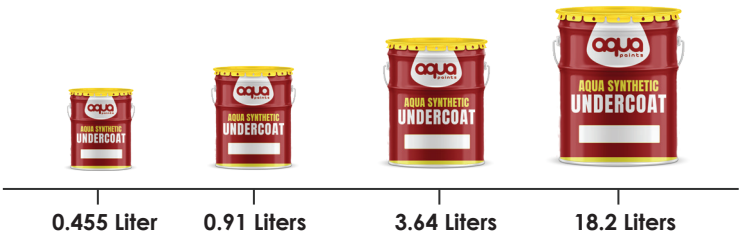

Coverage

120-125 Sft/Ltr/1 Coat

*Depending on Surface

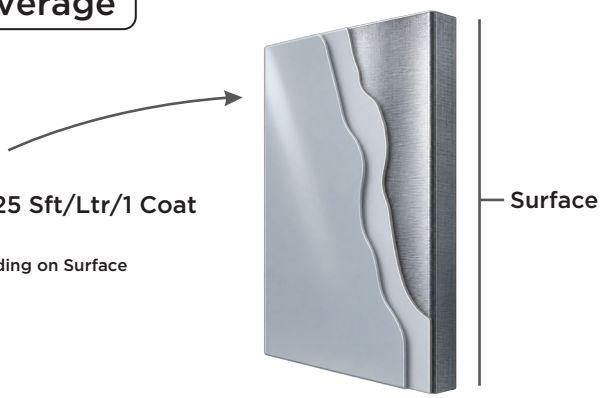

SURFACES



Industrial Machineries



All Types of Vehicles

AQUA SYNTHETIC UNDERCOAT

aqua paints
দেশের রঙে রাঙাই দেশ

METHOD OF APPLICATION



Remove grease and oil with Aqua Enamel Thinner; clean rust and corrosion.



Apply 1 coat of Challenger Primer using the recommended thinning ratio.



After 24 hours, apply 1 coat of Synthetic Undercoat with recommended thinning; allow to dry completely. Apply 1–2 coats of Topcoat.

THINNING RATIO



15-20%
by Volume

SHADES

White & Grey

PRODUCT SPECIFICATION

Thinner	Enamel Thinner Super Grade
Binder	Special type of Alkyd Resin
Viscosity	170 ±10 SEC @30°C (By Ford Cup4)
Touch Dry	50-60 Minutes
Hard Dry	4-6 Hours (Recoat > 6 Hrs.)
Finish	Matt
Application Method	Brush, Roller, Spray
Storage	12 months in a sealed container stored in a cool & dry place

CERTIFIED ISO 9001:2015 COMPANY