AQUA EPOXY ENAMEL TOPCOAT

aqua paints
দেশের রঙে রাঙাই দেশ

PRODUCT DESCRIPTION



A two pack epoxy based polyamide cured topcoat that gives high gloss & excellent adhesion. It provides good impact, excellent water & abrasion resistance. It gives excellent protection on exterior exposure but subject to chalking, which is usual with all epoxy coatings. It can be used as a topcoat for structural steel, machinery, equipment, tanks, nonferrous & concrete structure.

- CORROSION RESISTANT
- CHEMICAL RESISTANT
- WATER RESISTANT

PRODUCT INFORMATION

Pack Size




4 Liters

Coverage

130-145 Sft/Ltr/1 Coat

*Depending on Surface

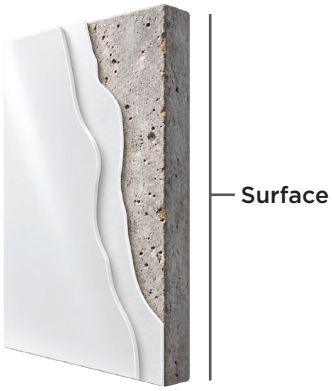

SURFACES

- Structural Steel
- Machinery
- Equipment
- Tanks
- Chemical Plants
- Concrete

METHOD OF APPLICATION

1. Clean the surface, remove rust, old paint, grease, wax, salt deposits, and contaminants. Repair any defects.
2. Mix paint with curing agent at the recommended ratio and use within the specified pot life.
3. Thin with Aqua Epoxy Thinner as recommended and apply by brush, roller, or spray.
4. Allow each coat to dry adequately before applying the next coat for optimum performance.

AQUA EPOXY ENAMEL TOPCOAT

aqua paints
দেশের রঙে রাঙাই দেশ

MIXING RATIOS

Base : Curing Agent = 2 : 1 by Volume

SHADES

White, Grey or as Per Shade Card

PRODUCT SPECIFICATION

Composition	Epoxy Resin, Polyamide, High Quality Suitable Pigments
Type	Two Pack
Finish	Smooth
Surface Dry	1-2 Hours
Tack Free	4 Hours
Full Cure	7 Days
Recoating	Overnight Minimum 72 Hours Maximum
Recommended DFT	35-45 Microns/1 Coat
Thinner	Aqua Epoxy Thinner
Heat Resistance	Maximum 150°C
Pot Life after Thinning	4-6 Hours Maximum
Application Method	Brush Roller Spray
Flash Point	< 70°F
Storage	12 months in a sealed container stored in a cool & dry place

CERTIFIED ISO 9001:2015 COMPANY