AQUA EPOXY PRIMER

aqua paints
দেশের রঙে রাঙাই দেশ

PRODUCT DESCRIPTION



A two pack epoxy based primer coat containing high quality anticorrosive pigment, has excellent water & abrasion resistance, very good solvent & chemical resistance. The primers can be used effectively on Structural steel, machinery, equipment, tanks, chemical plants, concrete etc. It can also be used with polyurethane and Chlororubber.

CORROSION RESISTANT

CHEMICAL RESISTANT

WATER RESISTANT

PRODUCT INFORMATION

Pack Size




4 Liters

Coverage

100-125 SFT/Ltr/1 Coat

*Depending on Surface

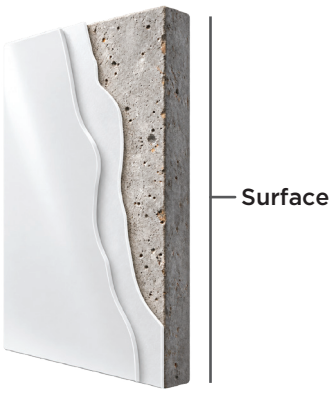

SURFACES

Structural Steel

Machinery

Equipment

Tanks

Chemical Plants

Concrete

METHOD OF APPLICATION

1. Clean the surface, remove rust, old paint, grease, wax, salt deposits, and contaminants. Repair any defects.
2. Mix paint with curing agent at the recommended ratio and use within the specified pot life.
3. Thin with Aqua Epoxy Thinner as recommended and apply by brush, roller, or spray.
4. Allow each coat to dry adequately before applying the next coat for optimum performance.

AQUA EPOXY PRIMER

aqua paints
দেশের রঙে রাঙাই দেশ

MIXING RATIOS

Base : Curing Agent = 2 : 1 by Volume

SHADES

White , Grey & Red Oxide

PRODUCT SPECIFICATION

Composition	Epoxy Resin, Polyamide, Anti Corrosive Pigments	Type	Two Pack	Finish	Matt to Eggshell
Surface Dry	50-60 Minutes	Tack Free	4 Hours	Full Cure	7 Days
Recoating	12 Hours Minimum (If Require)	Recommended DFT	35-45 Microns/1 Coat	Thinner	Aqua Epoxy Thinner
Heat Resistance	150°C	Pot Life after Thinning	4-6 Hours Maximum	Application Method	Brush, Roller, Spray
Flash Point	< 70°F	Storage	12 months in a sealed container stored in a cool & dry place		

CERTIFIED ISO 9001:2015 COMPANY