AQUA OUTER SHIELD

Exterior Acrylic Emulsion

aqua paints
দেশের রঙে রাঙাই দেশ

PRODUCT DESCRIPTION



Outer Shield Exterior Acrylic Emulsion is a good-quality exterior paint formulated with acrylic binder to provide durable protection, reliable weather resistance, and an attractive finish. Its advanced formulation helps maintain the original appearance of the coating for a longer period, even under changing outdoor conditions.

It contains special fungicides that help resist fungus, algae, and microbial growth on painted surfaces. Outer Shield is recommended for the protection and decoration of exterior cement plaster, masonry, brickwork, concrete, stone, asbestos, and cement sheet surfaces.

- LEAD FREE
- LONG LASTING
- ECO FRIENDLY
- FUNGAL & ALGAE RESISTANT
- GOOD COVERAGE

PRODUCT INFORMATION


Pack Size



Coverage

FOR EXTERIOR
160-180 SFT/Ltr/1 Coat
80-90 SFT/Ltr/2 Coats

*Depending on Surface

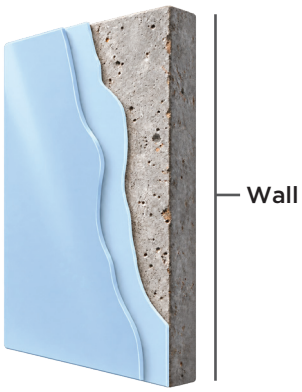

RECOMMENDED SURFACES

- Plaster
- Concrete
- Brick
- Asbestos
- Masonry Surface

METHOD OF APPLICATION

1. Clean the surface with a wire brush, wash with water, and dry completely.
2. Apply 1 coat of Aqua Super Sealer-X, diluted with clean water at a 1:1 ratio.
3. After 24 hours, apply 2 coats of Aqua Outer Shield at the recommended interval.

AQUA OUTER SHIELD

Exterior Acrylic Emulsion

aqua paints
দেশের রঙে রাঙাই দেশ

MIXING RATIOS

Roller
Paint : Water = 3:1

Brush
Paint : Water = 2:1

SHADES

Aqua Outer Shield Shade Card

INSTA COLOR **5000+ Shades**
*Currently Available Through Aqua Fandeck

PRODUCT SPECIFICATION

Pigments	Special pigments having excellent weather proof and light fastness
Thinner	Clean Water
pH	8.5 - 9.0
Touch Dry	30 Minutes
Hard Dry	8-10 Hours (Recoat)
Binder	Acrylic Emulsion
Heavy Metal Content	Not Detected
Finish	Matt
Viscosity	110±5 KU
Pot Life after Thinning	12 Hours Maximum
Storage	12 months in a sealed container stored in a cool & dry place

BSTI

CERTIFIED ISO 9001:2015 COMPANY